

FRONIUS GALVO

/ Not just an inverter, but an energy management system.



/ With power categories ranging from 1.5 to 3.1 kW, the Fronius Galvo is perfect for households – and is especially suitable for self-consumption systems. The integrated energy management relay allows the self-consumption component to be maximised. A host of other smart features make the Fronius Galvo one of the most future-proof inverters in its class: for example, the integrated datalogging, the simple connection to the internet by WLAN, or the plug-in card technology for retrofitting additional functions.


TECHNICAL DATA FRONIUS GALVO

INPUT DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
DC maximum power at $\cos \varphi = 1$	1,580 W	2,140 W	2,630 W	3,210 W	3,320 W
Max. input current ($I_{dc \max}$)	13.3 A	17.8 A	16.2 A	19.5 A	20.2 A
Max. array short circuit current	20.0 A	26.7 A	24.2 A	29.1 A	30.2 A
Min. input voltage ($U_{dc \min}$)		120 V		165 V	
Feed-in start voltage ($U_{dc \text{ start}}$)		120 V		165 V	
Nominal input voltage ($U_{dc \text{ r}}$)		260 V		330 V	
Max. input voltage ($U_{dc \max}$)		420 V		550 V	
MPP voltage range ($U_{mpp \min} - U_{mpp \max}$)		120 - 335 V		165 - 440 V	
Number of DC connections	3				


OUTPUT DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
AC nominal output ($P_{ac \text{ r}}$)	1,500 W	2,000 W	2,500 W	3,000 W	3,100 W
Max. output power	1,500 VA	2,000 VA	2,500 VA	3,000 VA	3,100 VA
Max. output current ($I_{ac \max}$)	6.8 A	9.1 A	11.4 A	13.6 A	14.1 A
Grid connection ($U_{ac \text{ r}}$)	1-NPE 230 V				
Min. output voltage ($U_{ac \min}$)	180 V				
Max. output voltage ($U_{ac \max}$)	270 V				
Frequency (f_r)	50 Hz / 60 Hz				
Frequency range ($f_{\min} - f_{\max}$)	45 - 65 Hz				
Total harmonic distortion	< 3.5 %				
Power factor ($\cos \varphi_{ac \text{ r}}$)	0.85 - 1 ind. / cap.				

GENERAL DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
Dimensions (height x width x depth)	645 x 431 x 204 mm				
Weight	16.8 kg				
Degree of protection	IP 55				
Protection class	1				
Overvoltage category (DC / AC)	2 / 3				
Night-time consumption	< 1 W				
Inverter concept	HF transformer				
Cooling	Regulated air cooling				
Installation	Indoor and outdoor installation				
Ambient temperature range	-25 - +50 °C				
Permitted humidity	0 to 100 %				
DC connection technology	Screw terminal connection 2.5 mm ² - 16 mm ²				
Mains connection technology	Screw terminal connection 2.5 mm ² - 16 mm ²				
Certificates and compliance with standards	AS 4777-2&3, AS3100, IEC 62109-1&2, IEC 61727, IEC 62116, G83, G59, DIN V VDE 0126-1-1/A1, VDE AR N 4105, CER 06-190, CEI 0-21, EN 50438, ÖVE / ÖNORM E 8001-4-712				

FRONIUS GALVO 3.1-1 EFFICIENCY CURVE

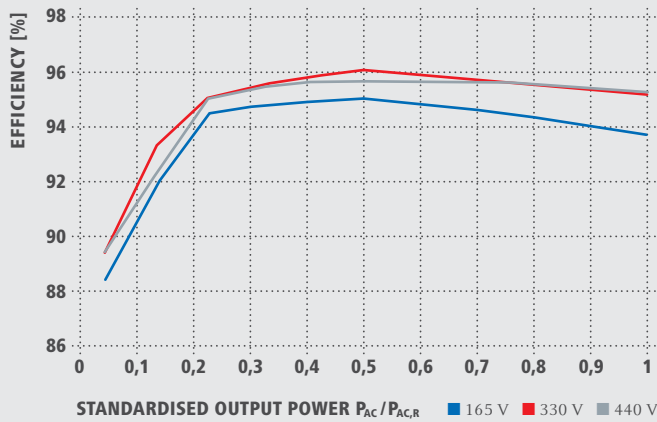

FRONIUS GALVO 3.1-1 TEMPERATURE DERATING

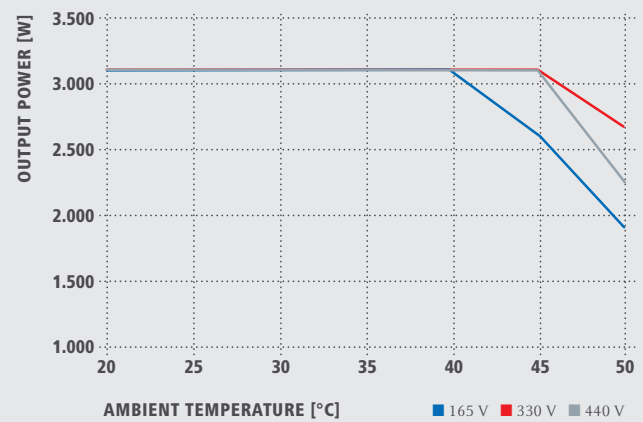

TECHNICAL DATA FRONIUS GALVO

EFFICIENCY	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
Max. efficiency	95.9 %	96.0 %		96.1 %	
European efficiency (η_{EU})	94.5 %	94.9 %	95.2 %	95.4 %	95.4 %
η at 5 % $P_{Ac,r}^{1)}$	84.5 / 86.0 / 86.0 %	84.2 / 86.1 / 85.9 %	88.6 / 89.6 / 89.4 %	88.2 / 89.2 / 89.1 %	88.4 / 89.4 / 89.4 %
η at 10 % $P_{Ac,r}^{1)}$	87.5 / 89.7 / 89.6 %	89.6 / 91.4 / 91.3 %	91.2 / 92.3 / 91.4 %	91.8 / 93.1 / 92.1 %	91.9 / 93.3 / 92.3 %
η at 20 % $P_{Ac,r}^{1)}$	91.3 / 93.3 / 93.1 %	92.6 / 94.3 / 93.9 %	94.0 / 94.8 / 94.5 %	94.4 / 95.0 / 94.9 %	94.5 / 95.0 / 95.0 %
η at 25 % $P_{Ac,r}^{1)}$	92.4 / 94.1 / 93.9 %	93.3 / 94.9 / 94.5 %	94.5 / 95.1 / 95.0 %	94.8 / 95.5 / 95.3 %	94.8 / 95.5 / 95.4 %
η at 30 % $P_{Ac,r}^{1)}$	93.0 / 94.6 / 94.3 %	93.6 / 95.2 / 94.9 %	94.8 / 95.5 / 95.3 %	94.8 / 95.7 / 95.6 %	94.9 / 95.8 / 95.6 %
η at 50 % $P_{Ac,r}^{1)}$	93.9 / 95.5 / 95.2 %	94.3 / 95.8 / 95.2 %	95.0 / 95.7 / 95.2 %	95.0 / 96.0 / 95.5 %	95.0 / 96.1 / 95.6 %
η at 75 % $P_{Ac,r}^{1)}$	94.2 / 95.6 / 95.4 %	94.0 / 95.9 / 95.6 %	94.8 / 95.9 / 95.6 %	94.6 / 95.8 / 95.6 %	94.5 / 95.6 / 95.6 %
η at 100 % $P_{Ac,r}^{1)}$	94.0 / 95.9 / 95.6 %	93.5 / 95.6 / 95.5 %	94.4 / 95.7 / 95.5 %	93.9 / 95.4 / 95.3 %	93.7 / 95.2 / 95.3 %
MPP adaptation efficiency	> 99.9 %				

PROTECTION DEVICES	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
DC insulation measurement	Warning/shutdown (depending on country setup) at $R_{ISO} < 600 \text{ k}\Omega$				
Overload behavior	Operating point shift, power limitation				
DC circuit breaker	Included				

INTERFACES	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
WLAN / Ethernet LAN	Fronius Solar.web / Fronius Solar.web, Modbus TCP, JSON				
6 inputs or 4 digital inputs/outputs	Interface to ripple control receiver				
USB (A socket) ²⁾	For USB sticks				
2x RS422 (RJ45 socket) ²⁾	Fronius Solar Net, interface protocol				
S0 input / signalling output ²⁾	Energy management (4-20 mA input / potential-free relay output)				
Datalogger and Webserver	Included				

¹⁾ and at $U_{mpp \text{ min}} / U_{dc,r} / U_{mpp \text{ max}}$. ²⁾ also available in the light version.

/ Battery Charging Systems / Welding Technology / Solar Electronics

WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS.

/ Whether Battery Charging Systems, Welding Technology or Solar Electronics - our goal is clearly defined: to be the technology and quality leader. With around 3,000 employees worldwide, we shift the limits of what's possible - our more than 850 active patents are testimony to this. While others progress step by step, we innovate in leaps and bounds. Further information about all Fronius products and our global sales partners and representatives can be found at www.fronius.com



v02 2012 EN